

Socket SDIO In-Hand Scan™ Card

World's Smallest Bar Code Scanner, Designed for Palm and Pocket PC 2003

Turn Your Palm PDA or Pocket PC 2003 into a High Performance Mobile Bar Code Scanner

If you're a mobile professional using a Palm PDA or Pocket PC 2003 with an SDIO slot for an application requiring extensive data entry, Socket's SDIO In-Hand Scan Card may provide an incredible increase in productivity.

Using manual or virtual keyboards is the slowest, most error-prone method of entering data into mobile computers. If the data to be entered is bar coded, using a bar code scanner is **50 times faster** and **10,000 times more accurate than manual data entry**.

Socket's SDIO In-Hand Scan Card brings a new level of affordability and convenience to mobile data collection by combining Socket's Battery Friendly™ SDIO technology with the world's smallest bar code scanner. Just plug the card into your PDA, launch the included SocketScan™ software, and read bar code data into any Windows or Palm application as if it had been typed on a keyboard.

Mobility Friendly® Design

Socket designed the SDIO In-Hand Scan Card to be Mobility Friendly — to use minimal power. Drawing only 8.0 mA (26.4 mW) in idle mode, the SDIO In-Hand Scan Card lets you operate for hours without having to replace or recharge your PDA's batteries. Plus, the included SocketScan™ software transfers scanned data directly into any Windows™ or Palm application as virtual keystrokes — no custom programming needed!



SDIO In-Hand Scan Card
and Palm Tungsten

FEATURES

- Integrated card and scanner plugs into the SDIO Card slot of the following devices:
 - Palm PDA running Palm OS 4.1 or greater
 - Pocket PC 2003 with SDIO Now! software from b SQUARE*
- One-handed operation with PDA improves efficiency
- Uses state-of-the-art linear CMOS image technology. This is the smallest bar code scan engine available today
- Automatically decodes the most popular bar code symbologies including UPC, EAN, Code 39, Code 128, Interleaved 2 of 5, Code 93 and more
- LED light source poses no safety or health hazards
- SocketScan keyboard emulation software allows the user to add Prefix and/or Suffix functions, such as Carriage Return and Tab, to further eliminate manual keystrokes
- SocketScan enables you to assign a beep tone or .WAV file to signify a successful scan
- Three-year warranty
- No extra batteries or special power adapter required — the SDIO card gets power from the mobile computer
- SDK for Palm OS or Windows Mobile available to application developers
- Socket Floating Trigger for Windows Mobile puts an icon on your Pocket PC screen that you can tap to trigger the scanner

*Note: SDIO slot of Pocket PC must support I/O (Input/Output)

Socket SDIO In-Hand Scan™ Card


SPECIFICATIONS

SDIO Card with Integrated
Bar Code Scanner for
Palm and Pocket PC 2003



SDIO In-Hand Scan Card

Product# IS5300-464

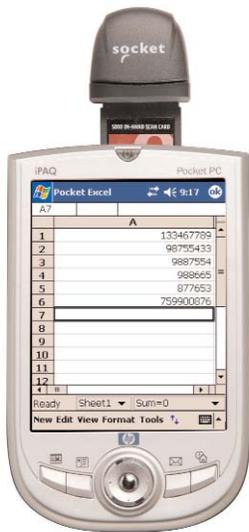

SDIO In-Hand Scan Card and HP iPAQ 1930 Pocket PC 2003



Corporate Headquarters:

Socket Communications, Inc.
37400 Central Court, Newark, CA 94560
Phone: 510-744-2700
Fax: 510-744-2727
www.socketcom.com

Physical Characteristics:

SDIO Card: 32 x 24 x 2 mm
Laser Scanner: 27.1 x 29.6 x 14.8 mm
Total Mass: 9.0 g

Power Consumption (with 3.3V):

Idle: 8 mA (26.4 mW)
Scanning: 56 mA

Operating System Support:

- Windows Mobile 2003 with SDIO Now! software from bSQUARE
- Palm OS v4.1 or greater

Interface Standards: SDIO

Warranty: Three years

Certification:

FCC: Part 15, Class B
CE: EN55024:1998 **C-TICK** s.182

Bar Code Symbologies Decoded:

UPC/EAN, Code 128, Code 39, I 2of5, D2of5, Code 93, Codabar, MSI/Plessey, Code 11 and Web Code

Scanner Performance:

Decode Distances: 1.5 to 24+ inches depends on symbol size, symbology, label media, W-N Ratio, scan angle

Included Software:

- Installation utility
- SocketScan™ with keyboard emulation for Palm and Windows Mobile
- Socket Floating Trigger (only for Windows Mobile)

SocketScan™ Software:

- Reads bar code data into any Windows or Palm OS application as if it were manually typed
- Lets you add Prefixes and/or Suffixes (e.g., Carriage Return or Tab) to further eliminate manual keystrokes
- Lets you assign a beep tone or .WAV file to signal a good scan
- Lets you easily enable/disable any of the supported symbologies
- Scan Demo reports symbology, length and decoded data (in ASCII or Hex) of any scanned bar code (among 10 supported symbologies)

SocketScan SDK for Palm OS or Windows available for developers

For Additional Product Information:

Website: www.socketcom.com
Email: info@socketcom.com
FTP: [ftp.socketcom.com](ftp://ftp.socketcom.com)

SALES OFFICES:

Corporate Headquarters:

Phone: 510-744-2700
Domestic Toll Free: 800-552-3300
Fax: 510-744-2727
Email: www.socketcom.com/contact

